

Institut Bauen und Umwelt e.V.  
Panoramastraße 1  
10178 Berlin

Tel.: 030 3087748-0  
Fax: 030 3087748-29  
E-Mail: [info@bau-umwelt.com](mailto:info@bau-umwelt.com)



[Association](#) [News](#) [Members](#) [EPD](#) [Sustainability](#) [Service](#) [Partners](#) [Database](#)

## Environmental Product Declarations (EPDs) by construction categories

Below you can find all our currently over 500 environmental product declarations (EPDs) for construction sorted by categories.

All EPDs are stored as PDF files and can be opened in the browser by clicking.

**Institut Bauen und Umwelt e.V. (IBU)** • Panoramastraße 1 • 10178 Berlin • Tel.: +49 (0) 30 3087748-0 • Fax: +49 (0) 30 3087748-29 • [info@bau-umwelt.com](mailto:info@bau-umwelt.com)

Institut Bauen und Umwelt e.V.  
Panoramastraße 1  
10178 Berlin  
  
Tel.: 030 3087748-0  
Fax: 030 3087748-29  
E-Mail: [info@bau-umwelt.com](mailto:info@bau-umwelt.com)



[Association](#) [News](#) [Members](#) [EPD](#) [Sustainability](#) [Service](#) [Partners](#) [Database](#)

## What purpose do environmental product declarations serve?

- Environmental Product Declarations (EPD) form the basis for the data for assessing buildings on an ecological level. This is currently laid down in the new European Standards project "Sustainability of buildings".
- Environmental Product Declarations are based on ISO standards and are therefore internationally aligned. They are suitable as proof of environmental claims in the public procurement arena.
- Environmental Product Declarations offer the relevant basic data on environmental properties of a product for sales and marketing purposes.

## Environmental Product Declarations (EPD)

Most buildings are assigned to the building in one "system". A Type-III declaration for building products which also helps to assess the entire building, thus lent itself to being created. Resource consumption and environmental emissions are recorded throughout the entire manufacturing process. The resulting contribution to the greenhouse effect, or eutrophication or acidification of water can be quantified and assessed using Lifecycle Assessment methodology. Lifecycle Assessments also provide a systematic and standardised basis for data in order to create an ecological assessment of a building in the "modular construction system" from declarations on individual building products. In a lifecycle analysis, the entire life of the building, the building phase with possible conversions as well as demolition and disposal are taken into consideration and the contribution of the building products to energy efficiency or to other aspects of sustainable management of a building are represented.

The declaration includes statements on the use of energy and resources and to what extent a product contributes to the greenhouse effect, acidification, eutrophication, destruction of the ozone layer and smog formation. In addition, details are given about the technical properties which are required for assessing the performance of the building products in the building, like durability, heat and sound insulation or the influence on the quality of the indoor air.

The ISO-Type-III declaration is directed at many target groups in regards to these qualitative statements about environmental performance of building products: Planners, architects, building companies, real estate companies, facility manager and of course the companies who are involved in manufacturing and serving the supply chain from raw materials to the building itself.

**Institut Bauen und Umwelt e.V. (IBU)** • Panoramastraße 1 • 10178 Berlin • Tel.: +49 (0) 30 3087748-0 • Fax: +49 (0) 30 3087748-29 • [info@bau-umwelt.com](mailto:info@bau-umwelt.com)

Institut Bauen und Umwelt e.V.  
Panoramastraße 1  
10178 Berlin

Tel.: 030 3087748-0  
Fax: 030 3087748-29  
E-Mail: [info@bau-umwelt.com](mailto:info@bau-umwelt.com)



[Association](#) [News](#) [Members](#) [EPD](#) [Sustainability](#) [Service](#) [Partners](#) [Database](#)

## Environmental Product Declarations (EPDs) by construction categories

Below you can find all our currently over 500 environmental product declarations (EPDs) for construction sorted by categories.

All EPDs are stored as PDF files and can be opened in the browser by clicking.

---

**Institut Bauen und Umwelt e.V. (IBU)** • Panoramastraße 1 • 10178 Berlin • Tel.: +49 (0) 30 3087748-0 • Fax: +49 (0) 30 3087748-29 • [info@bau-umwelt.com](mailto:info@bau-umwelt.com)



# ENVIRONMENTAL PRODUCT DECLARATION




as per ISO 14025 and EN 15804

Owner of the Declaration	EUROROC - European & International Federation of Natural Stone Industries
Programme holder	Institut Bauen und Umwelt e.V. (IBU)
Publisher	Institut Bauen und Umwelt e.V. (IBU)
Declaration number	EPD-EUR-2013253-CBG1-EN
Issue date	07.05.2014
Valid to	06.05.2019

**Tiles and Slabs from natural stone**  
**EURO-ROC**



[www.bau-umwelt.com](http://www.bau-umwelt.com) / <https://epd-online.com>

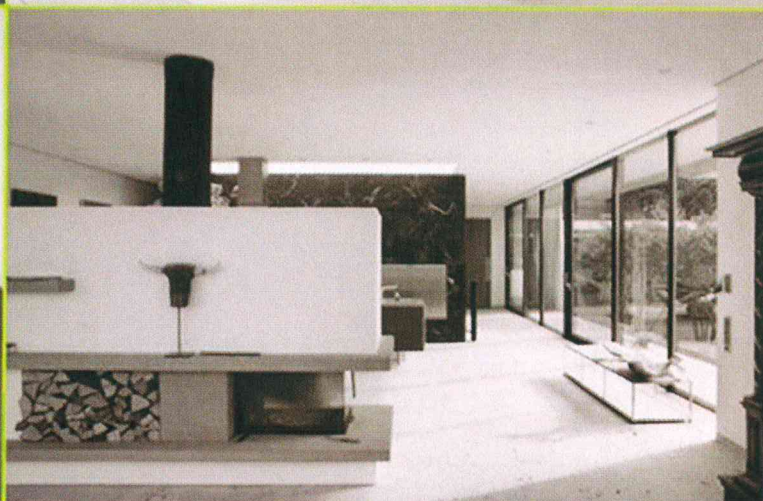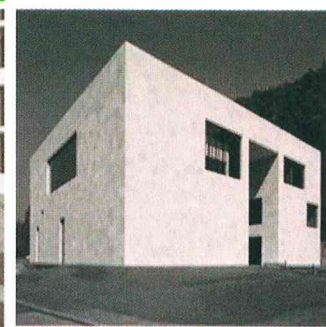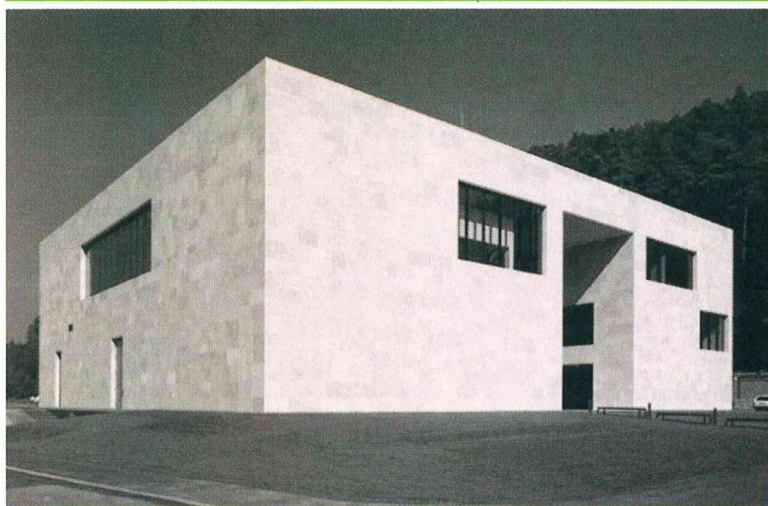





## General Information

### EURO-ROC

#### Programme holder

IBU - Institut Bauen und Umwelt e.V.  
Panoramastr. 1  
10178 Berlin  
Germany

#### Declaration number

EPD-EUR-2013253-CBG1-EN

#### This Declaration is based on the Product Category Rules:

Dimension stone for roof, wall and floor applications, 07-2012  
(PCR tested and approved by the independent expert committee)

#### Issue date

07.05.2014

#### Valid to

06.05.2019

Prof. Dr.-Ing. Horst J. Bossenmayer  
(President of Institut Bauen und Umwelt e.V.)

Dr. Burkhard Lehmann  
(Managing Director IBU)

### Tiles and Slabs from natural stone

#### Owner of the Declaration

EUROROC - European & International Federation of Natural Stone Industries  
Gluckstrasse 10  
65193 Wiesbaden, Germany

#### Declared product / Declared unit

1 ton tiles and slabs from natural stone

#### Scope:

This documentation includes information related to 1 ton tiles and slabs from natural stone which are produced by the 10 EUROROC member companies. Collected data in purpose of Life Cycle Assessment are based in the years of 2009 to 2011. EUROROC association EPD declares a weighted average referring to the annual production volumes of participants. EUROROC association represents 60% to 65% of European natural stone producers. EUROROC states that the 10 members are representative for all of its members, because the technology is similar. The owner of the declaration shall be liable for the underlying information and evidence; the IBU shall not be liable with respect to manufacturer information, life cycle assessment data and evidences. The owner of the declaration shall be liable for the underlying information and evidence; the IBU shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

#### Verification

The CEN Norm EN 15804 serves as the core PCR  
Independent verification of the declaration  
according to ISO 14025

☐ internally ☒ externally

Mr Carl-Otto Neven  
(Independent tester appointed by SVA)

## Product

### Product description

Natural stone is a naturally occurring building material that had emerged in the course of millions of years. According to the rock genesis, which has a significant impact on technical properties, the following main groups of natural stones can be distinguished:

- a) Igneous rock
- b) Sedimentary rock
- c) Metamorphic rock

Natural stones are used as tiles (thickness up to 12 mm), slabs (thickness more than 12 mm up to 80 mm) or massive slabs (thickness more than 80 mm) with different sizes.

The declared product is an average natural stone from these three rock types with an average thickness of 40 mm as an average of 10 different companies, weighted by their production volumes. The shares of the rock types of the total production volume of all manufacturers is: igneous rock 27%, sedimentary rock 64%, metamorphic rock 9%.

At the quarry, natural stones are mined and later go through block sawing, calibration, polishing, and sizing in order to meet the customer request on dimensions and surface quality.

### Placing on the market

For the placing on the market in the EU/EFTA the Regulation (EU No 305/2011) applies. The products need a declaration of performance taking into consideration the EN 771-6 – specification for masonry units; part 6: Natural stone masonry units/ and the CE-marking.

### Application

For the application and use the respective national provisions apply.

Natural stone slabs are used for flooring, cladding, stairs, monuments, kitchen tops, cubic building elements and many other applications.





Natural stones with their unique physical and aesthetic properties comprise an ideal raw material for the construction industry.

Natural stones find numerous uses in the construction industry from outdoor applications including stone patios, pool decks/coping, steps, walkways and stone walls to interior applications for flooring, bathroom/kitchen renovations, stairs, fireplace re-faces, or manufactured veneers and they significantly contribute to the improvement of the quality and the overall aesthetics and performance of buildings and open spaces.

The European stone sector has a leading position in the global stone and equipment market.

Specifications for products of natural stone are:

- /EN 771-6, Specification for masonry units - Part 6: Natural stone masonry units/
- /EN 1341, Slabs of natural stone - Requirements and test methods/
- /EN 1342, Sets of natural stone - Requirements and test methods/
- /EN 1343, Kerbs of natural stone - Requirements and test methods/
- /EN 1467, Natural stone - Rough blocks - Specifications./
- /EN 1468, Natural stone - Rough slabs - Specifications./
- /EN 1469, Natural stone - Finished products, slabs for claddings - Specifications/
- /EN 12057, Natural stone - Finished products, modular tiles
- – Specifications/
- /EN 12058, Natural stone - Finished products, slabs for floors and stairs. Specifications./
- /EN 12059, Natural stone - Dimensional stone work - Specifications./

## Technical Data

The following construction data are classified into the three major stone groups:

- a) Igneous rock
- b) Sedimentary rock
- c) Metamorphic rock

Name	Value	Unit
Compressive strength acc. to /EN 1926/	a) 100 - 300	N/mm <sup>2</sup>
	b) 20 - 240	N/mm <sup>2</sup>

	c) 100 - 280	N/mm <sup>2</sup>
Flexural strength acc. to /EN 12372/	a) 5 - 25	N/mm <sup>2</sup>
	b) 1 - 20	N/mm <sup>2</sup>
	c) 5 - 40	N/mm <sup>2</sup>
Water absorption acc. to EN 13755	a) 0.1 - 1	M.-%
	b) 0.1 - 10	M.-%
	c) 0.3 - 2	M.-%
Gross density acc. to EN 1936	a) 2.000 - 3.000	kg/m <sup>3</sup>
	b) 1.700 - 2.900	kg/m <sup>3</sup>
	c) 2.600 - 3.000	kg/m <sup>3</sup>
Thermal conductivity	1.2 - 3.4	W/(mK)
Wear resistance acc. to DIN EN 14157	14 - 35	mm
Specific heat capacity	0.92	kJ/kgK

## Base materials / Ancillary materials

The base materials are:

- a) Igneous rock
- b) Sedimentary rock
- c) Metamorphic rock

Each product consists of 100% of only one rock type.

For the transportation of natural stone to the customers, depending on the type of product, wooden pallets, polyethylene films, and Styrofoam packaging is used. The average amounts of ancillary materials are included in this declaration.

Because of the natural rock source, natural stones do not contain harmful substances.

For some special applications, e.g. kitchen tops and bathrooms, some natural stones are treated with silicone resin based products.

Also some natural stones having many cracks and pores are filled with epoxy or polyester.

## Reference service life

Reference service life is not relevant due to cradle to gate boundary conditions.

## Compliance with social standards

Evidence of compliance with social standards of production in the EPD. As all relevant quarries of this study are in Europe, safety provisions for the workforce and absence of child labour are guaranteed.

## LCA: Calculation rules

### Declared Unit

This EPD refers to 1 ton of tiles and slabs from natural stone.

Results refer to a weighted average of EUROROC member companies, therefore also averaging the three major stone groups. The average thickness of the product is 0.04 m.

It means 1 ton of product is equal to 9.11 m<sup>2</sup>.

### Declared unit

Name	Value	Unit
Declared unit	1	t
Gross density	2744	kg/m <sup>3</sup>
Conversion factor to 1 kg	0.0003644	m <sup>3</sup> /kg

Natural stone units are produced from thin tiles with 10 mm thickness up to massive slabs with more than 100 mm thickness. Therefore this EPD is declared for average thickness of 0.04 m



### System boundary

Type of EPD: Declaration of a product as an average from several manufacturers plants.

The study is a cradle-to-gate LCA study including the transport to costumers; it covers all of the production steps from raw materials in the earth (i.e. the cradle) to finished products (i.e. the gate) ready to be installed at the customers (including the transportation to installation site).

This definition includes all the activities associated with the production at stone manufacturing sites and upstream activities; from the mining and the processing of raw materials, transport to site and the consumption of any material or energy resources during any of these production stages.

Some activities are not considered in this study on the basis that their influence on the environmental impact is negligibly small (a concept known as materiality). Such activities include capital equipment, business travel, administration, cleaning services etc.

Downstream processing into manufactured products and their use has not been included in the inventory. For example, the treatment with silicone resin, epoxy or polyester based products for special applications, like kitchen tops and bathrooms, is not included in the LCA. This would contribute around 0.3% of mass. This EPD describes the production of 1 ton of natural stone products, from mining, transporting, and production (sawing, calibration, polishing, and sizing). Further optional treatments of the surface (with products based on silicone resin, epoxy or polyester) are not considered.

Lengths, widths and thicknesses are available to meet the various design specifications and requirements.

### Comparability

Basically, a comparison or an evaluation of EPD data is only possible if all the data sets to be compared were created according to /EN 15804/ and the building context, respectively the product-specific characteristics of performance, are taken into account.

## LCA: Scenarios and additional technical information

This EPD is applicable to different products of natural stone, which are used in the construction and building industry.

The analysis of the product life cycle includes production of the basic materials, transport of the basic materials, manufacture of the product and the packaging materials and is declared in module A1-A3. On site waste treatment is also declared in module A3. Neither use-phase nor end-of-life is included in the LCA calculation. This needs to be considered on next level by the evaluation of buildings.

### Transport to the building site (A4)

Name	Value	Unit
Litres of fuel [truck]	0.00135	l/100km
Litres of fuel [train]	0.00474	L/100km
Transport distance	411	km
Capacity utilisation (including empty runs)	85	%
Gross density of products transported	2744	kg/m <sup>3</sup>

80% distance with truck and 20% distance with train





## LCA: Results

### DESCRIPTION OF THE SYSTEM BOUNDARY (X = INCLUDED IN LCA; MND = MODULE NOT DECLARED)

PRODUCT STAGE			CONSTRUCTION PROCESS STAGE		USE STAGE							END OF LIFE STAGE				BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARIES
Raw material supply	Transport	Manufacturing	Transport from the gate to the site	Assembly	Use	Maintenance	Repair	Replacement <sup>1)</sup>	Refurbishment <sup>1)</sup>	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND

### RESULTS OF THE LCA - ENVIRONMENTAL IMPACT: 1 ton tiles and slabs from natural stone

Parameter	Unit	A1 - A3	A4
Global warming potential	[kg CO <sub>2</sub> -Eq.]	2.55E+2	2.05E+1
Depletion potential of the stratospheric ozone layer	[kg CFC11-Eq.]	5.81E-8	3.58E-10
Acidification potential of land and water	[kg SO <sub>2</sub> -Eq.]	7.25E-1	1.3E-1
Eutrophication potential	[kg (PO <sub>4</sub> ) <sup>3-</sup> -Eq.]	6.75E-2	3.12E-2
Formation potential of tropospheric ozone photochemical oxidants	[kg Ethen Eq.]	4.17E-2	-4.69E-2
Abiotic depletion potential for non fossil resources	[kg Sb Eq.]	3.2E-5	7.64E-7
Abiotic depletion potential for fossil resources	[MJ]	3.39E+3	2.83E+2

### RESULTS OF THE LCA - RESOURCE USE: 1 ton tiles and slabs from natural stone

Parameter	Unit	A1 - A3	A4
Renewable primary energy as energy carrier	[MJ]	5.52E+2	1.11E+1
Renewable primary energy resources as material utilization	[MJ]	0.0E+0	0.0E+0
Total use of renewable primary energy resources	[MJ]	5.52E+2	1.11E+1
Non renewable primary energy as energy carrier	[MJ]	3.88E+3	2.84E+2
Non renewable primary energy as material utilization	[MJ]	0.0E+0	0.0E+0
Total use of non renewable primary energy resources	[MJ]	3.88E+3	2.84E+2
Use of secondary material	[kg]	0.0E+0	0.0E+0
Use of renewable secondary fuels	[MJ]	0.0E+0	0.0E+0
Use of non renewable secondary fuels	[MJ]	0.0E+0	0.0E+0
Use of net fresh water	[m <sup>3</sup> ]	8.29E-1	1.23E-2

### RESULTS OF THE LCA – OUTPUT FLOWS AND WASTE CATEGORIES:

#### 1 ton tiles and slabs from natural stone

Parameter	Unit	A1 - A3	A4
Hazardous waste disposed	[kg]	8.44E-2	0.0E+0
Non hazardous waste disposed	[kg]	5.23E+2	3.68E-2
Radioactive waste disposed	[kg]	1.96E-1	3.95E-4
Components for re-use	[kg]	0.0E+0	0.0E+0
Materials for recycling	[kg]	0.0E+0	0.0E+0
Materials for energy recovery	[kg]	0.0E+0	0.0E+0
Exported electrical energy	[MJ]	0.0E+0	0.0E+0
Exported thermal energy	[MJ]	0.0E+0	0.0E+0

## References

### Institut Bauen und Umwelt

Institut Bauen und Umwelt e.V., Berlin (pub.):  
Generation of Environmental Product Declarations (EPDs);

### General principles

for the EPD range of Institut Bauen und Umwelt e.V. (IBU), 2013-04  
www.bau-umwelt.de

### PCR Part A

Institut Bauen und Umwelt e.V., Königswinter (pub.):  
Product Category Rules for Construction Products  
from the range of Environmental Product Declarations  
of Institut Bauen und Umwelt (IBU), Part A: Calculation  
Rules for the Life Cycle Assessment and  
Requirements on the Background Report. April 2013

www.bau-umwelt.de

### ISO 14025

DIN EN ISO 14025:2011-10: Environmental labels and  
declarations — Type III environmental declarations —  
Principles and procedures

### EN 15804

EN 15804:2012-04+A1 2013: Sustainability of  
construction works — Environmental Product  
Declarations — Core rules for the product category of  
construction products

### PCR 2013, Part B

PCR Guidance-Texts for Building-Related Products  
and Services. From the range of Environmental  
Product Declarations of Institute Construction and



**Publisher**

Institut Bauen und Umwelt e.V.  
Panoramastr. 1  
10178 Berlin  
Germany

Tel +49 (0)30 3087748- 0  
Fax +49 (0)30 3087748- 29  
Mail [info@bau-umwelt.com](mailto:info@bau-umwelt.com)  
Web [www.bau-umwelt.com](http://www.bau-umwelt.com)

**Programme holder**

Institut Bauen und Umwelt e.V.  
Panoramastr. 1  
10178 Berlin  
Germany

Tel +49 (0)30 - 3087748- 0  
Fax +49 (0)30 - 3087748 - 29  
Mail [info@bau-umwelt.com](mailto:info@bau-umwelt.com)  
Web [www.bau-umwelt.com](http://www.bau-umwelt.com)



**PE INTERNATIONAL**  
SUSTAINABILITY PERFORMANCE

**Author of the Life Cycle Assessment**

PE International AG  
Hauptstrasse 111 - 113  
70771 Leinfelden-Echterdingen  
Germany

Tel +49 711 341817-0  
Fax +49 711 341817-25  
Mail [info@pe-international.com](mailto:info@pe-international.com)  
Web [www.pe-international.com](http://www.pe-international.com)

**Owner of the Declaration**

EUROROC - European & International  
Federation of Natural Stone Industries  
Gluckstrasse 10  
65193 Wiesbaden  
Germany

Tel +49.611.97712.11  
Fax +49.611.97712.48  
Mail [office@euroroc.net](mailto:office@euroroc.net)  
Web [www.Euroroc.net](http://www.Euroroc.net)